


# TenCate Miragrid® GX T

## Technical Data

TenCate Miragrid GX® biaxial geogrids are engineered materials suitable for subgrade stabilisation and base reinforcement applications. They are composed of high modulus polyester fibres, knitted in a flat orientation and covered with a protective polymeric coating.

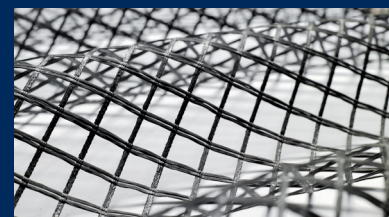

TenCate Miragrid® GX T

| Properties [Standard]                             | Unit      | GX 20/20 T | GX 30/30 T | GX 35/35 T | GX 40/40 T | GX 55/55 T | GX 80/80 T |        |
|---|-----------|------------|------------|------------|------------|------------|------------|--------|
| <b>Mechanical Properties</b>                      |           |            |            |            |            |            |            |        |
| Tensile strength<br>[EN ISO 10319]                | MD*       | kN/m       | 20         | 30         | 35         | 40         | 55         | 80     |
|   | CMD*      | kN/m       | 20         | 30         | 35         | 40         | 55         | 80     |
| Elongation at nominal strength<br>[EN ISO 10319]  | MD*       | %          | 10         | 10         | 10         | 10         | 10         | 10     |
|   | CMD*%     |            | 10         | 10         | 10         | 10         | 10         | 10     |
| Tensile strength at<br>3%<br>5%<br>[EN ISO 10319] | MD & CMD* | kN/m       | 6          | 8          | 10         | 11         | 14         | 19     |
|   | MD & CMD* | kN/m       | 10         | 14         | 16         | 20         | 24         | 35     |
|   |           |            |            |            |            |            |            |        |
| Mesh size [indicative]                            | MD*       | mm         | 30         | 30         | 30         | 25         | 25         | 25     |
|   | CMD*      | mm         | 30         | 30         | 30         | 25         | 25         | 25     |
| <b>Forms of Supply</b>                            |           |            |            |            |            |            |            |        |
| Roll width  |           | m          | 5.3        | 5.3        | 5.3        | 5.3        | 5.3        | 5.3    |
| Roll length                                       |           | m          | 50/100     | 50/100     | 50/100     | 50/100     | 50/100     | 50/100 |
| Roll weight [indicative]                          |           | kg         | 60         | 75         | 80         | 100        | 120        | 160    |

\*MD = Machine Direction / CMD = Cross Machine Direction min: These values are given within the 95% confidence level.

For information concerning long term design strength, friction behaviour or other product properties please contact TenCate Geosynthetics.

The values given are average values obtained in our laboratories and in accredited testing institutes. The information given in this datasheet is to the best of our knowledge true and correct. However new research results and practical experience can make revisions necessary.

The right is reserved to make changes without notice at any time. No guarantee or liability can be drawn from the information mentioned herein.

### TENCATE GEOSYNTHETICS AUSTRIA GMBH

Schachermayerstr. 18 Tel.: +43 (0)732 6983 0, Fax +43 (0)732 6983 5353  
4021 Linz, Austria service.at@tencategeo.com, www.tencategeo.eu

**BeNeLux** Tel.: +31 546 544 811 service.nl@tencategeo.com  
**Bulgaria** Tel.: +359 887 116 880 service.at@tencategeo.com  
**Croatia** Tel.: +385 91 463 4455 service.hr@tencategeo.com  
**Czech Republic** Tel.: +420 2 2425 1843 service.cz@tencategeo.com  
**Africa** Tel.: +33 1 34 23 53 63 service.fr@tencategeo.com  
**Germany** Tel.: +49 911 340 869 10 service.de@tencategeo.com  
**Italy** Tel.: +39 0362 34 58 11 service.it@tencategeo.com

**Near Middle East** Tel.: +971 4810 3295 service.nme@tencategeo.com  
**Norway** Tel.: +47 975 86 656 geonordic@tencategeo.com  
**Romania** Tel.: +40 740 955 194 service.ro@tencategeo.com  
**Russia/CIS** Tel.: +7 916 150 1905 service.ru@tencategeo.com  
**Spain/Portugal** Tel.: +34 607 499 962 service.es@tencategeo.com  
**Sweden** Tel.: +47 975 86 656 geonordic@tencategeo.com  
**Turkey** Tel.: +90 505 530 1983 service.tr@tencategeo.com  
**United Kingdom** Tel.: +44 1952 588 066 service.uk@tencategeo.com



TenCate Geosynthetics Austria GmbH, TenCate Geosynthetics France S.A.S and TenCate Geosynthetics Netherlands b.v. are certified for the design, manufacturing and sales of geotextile and geotextile related products.



02.2022 | EN | DA